

# Product Data Sheet




**Type/Item No:** RLED10

## Features:

**High Output LED** 1x10w 12v DC –240AC with an operating current of 600Ma and supplied c/w LED driver. Designed beam angel of 40deg offers excellent coverage and distribution. The body is manufactured from aluminium and the finish is silver. An operating temperature range of –10deg to +45deg. Average life span 30000hrs. No heat concerns with specially designed ribbed diecast heat sink assembly fitted to the back designed as active cooling system. Short circuit and thermal protection. Beam Angle 45Deg, The LED driver is dimmable type: leading-edge (triac). Designed with 20Deg tilt adjustment. Downlight should be located in a well ventilated area .

**Suitable for C-Bus system**

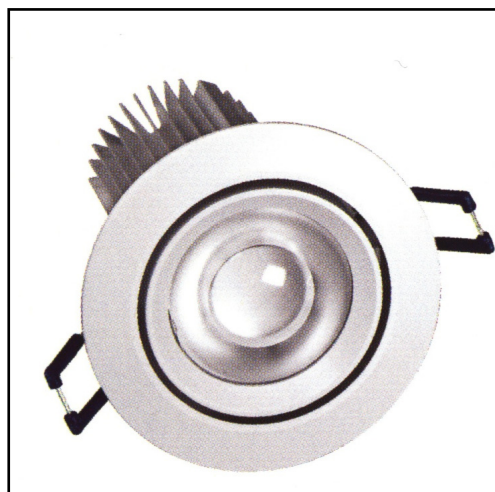

## LED Performance

### Warm White

**Luminous Flux** 696lm  
**Luminous Efficacy** 63lm/w  
**Input Power** 11w  
**Colour temperature** 3000K

## Class:

1 IP20

## Colour:

White

## Lamp:

1x10w single chip LED



## Gear:

Australian Approved; LED Driver

### COMPLIANCES:

Magnetic Emission EN55015  
 Harmonic EN61000-3-2  
 Flicker EN61000-3-3  
 Immunity EN61547  
 Safety EN61347-1  
 Tested to IEC 61347-2-13(LED control gear)

SAA approval no: SAA111542EA

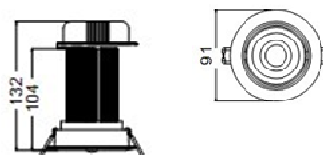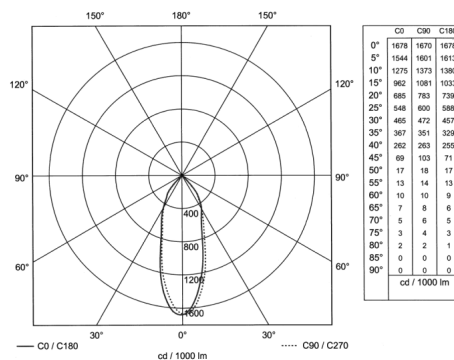

Cut Out 78mm

## Dimensions:

